



E-Con Precast System

ENGINEER ** MANUFACTURER ** PROJECT CO-ORDINATOR

MANUFACTURER OF CONCRETE PAVERS, CHEQUERED TILES, R.C.C. BENCH, CONCRETE COVER BLOCK, CONCRETE DOOR FRAME, MANHOLE COVER, PRECAST BOUNDARY WALL

ROOM # 22, OLD BUS STAND COMPLEX, P.O.: KALNA, DIST : PURBA BURDWAN W.B.-713409, MOB: +91 95644 29100; email: info@econ.in / econprecast@gmail.com; www.econ.in

CONCRETE BENCH



**LATEST & BEST
CONCRETE
BUILDING MATERIAL
FOR ANY
SIZE PROJECT**





www.econ.in
+91 95644 29 100

FINISHING CONCRETE

Dried concrete imperfections smoothed out with round stone. Rounding off of the inside edges with a round stone can improve appearances.

DIMENSIONS (IN MM)

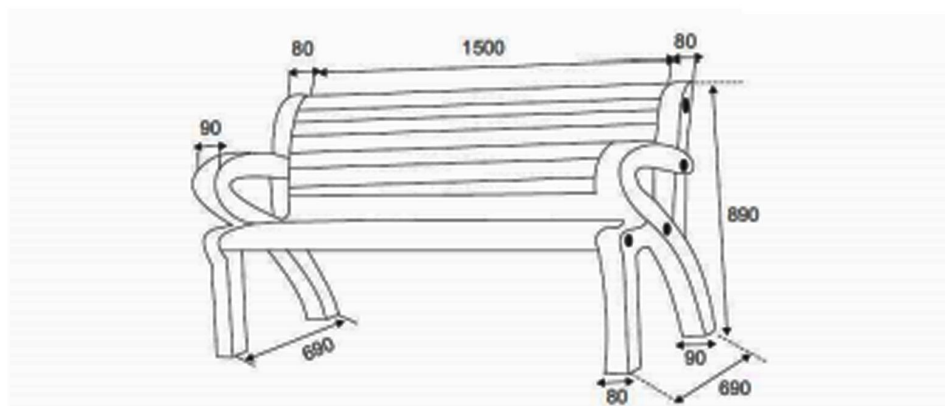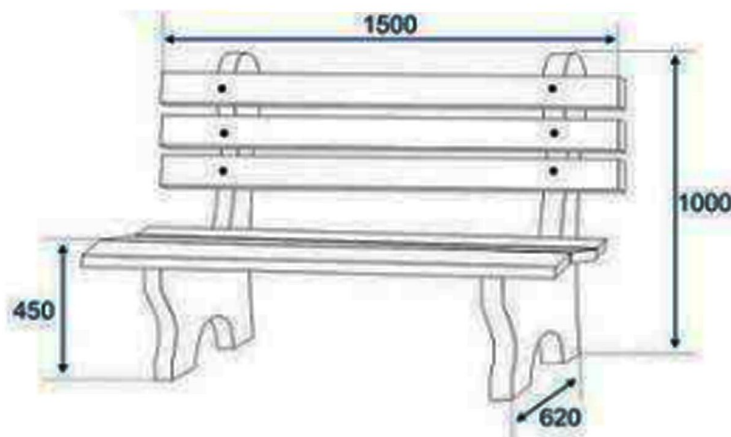



www.econ.in
+91 95644 29 100

LATEST & BEST CONCRETE BUILDING MATERIAL FOR ANY SIZE PROJECT

FEATURES & SPECIFICATION

Each bench consists of 2 Nos L-shape base support in grey cement color (thickness:100 mm, Back height:1000 mm, front height: 450 mm, Base width: 620mm) and 5 Nos. reinforced concrete planks in preferable color of size 1500mm X 100mm X 50mm, and 1 No. of reinforced concrete plank of size 1500mm X 200mm X 50mm

Overall Dimensions: Seating length of the Bench:1500 mm; Seating height of the Bench:450 mm; Total height of the Bench:1000 mm All components are reinforced suitably for long use and to prevent damage during handling, transportation, and erection.

All components are reinforced suitably for long use and to prevent damage during handling, transportation, and erection.

All parts are joined together with galvanized nuts & bolts of suitable size and all bolts are sealed after installation.

Bench top and back planks are treated with special anti-corrosive, water proof coating so as to make surfaces glossy and water proof.

All components are manufactured by using M-30 grade of Concrete using vibro compaction process.

REINFORCEMENT AND ADDITIVES

Reinforcing rods are placed suitably in the poured concrete in critical areas, such as the bench back and support area. HYSD rebar works well. Mixing varying amounts of fibre mesh additive to the concrete mix can also strengthen the mix.

DRYING

After pouring concrete, moulds are gently tapped around circumference to release air bubbles. Concrete can be removed from the mould after 24-36 hours, depending on local drying conditions. The concrete cured for maximum strength in 28 days.



PARK BENCH



PLATFORM BENCH



www.econ.in
+91 95644 29 100



e-Con Precast System is a one-stop destination for availing Precast Concrete Building Components viz. Interlocking Glossy Pavers, Concrete Paving Tiles, Kerb Stones, R.C. Concrete Frames, Concrete Cover blocks, Manhole Cover, Concrete Bench and Precast Boundary wall. Available in various designs and patterns, the range can be provided in various dimensions and colours as well. All the products are manufactured using the best raw materials like, Sand, Cement, Fly Ash and Stone Chips etc. All the products are checked for quality at each stage of production and appreciated for durability, attractive designs, strength and affordable pricing.

Thank You