



E-Con Precast System

ENGINEER ** MANUFACTURER ** PROJECT CO-ORDINATOR

MANUFACTURER OF CONCRETE PAVERS, CHEQUERED TILES, R.C.C. BENCH, CONCRETE COVER BLOCK, CONCRETE DOOR FRAME, MANHOLE COVER, PRECAST BOUNDARY WALL

ROOM # 22, OLD BUS STAND COMPLEX, P.O.: KALNA, DIST : PURBA BURDWAN W.B.-713409, MOB: +91 95644 29100; email: info@econ.in / econprecast@gmail.com; www.econ.in

INTERLOCKING PAVER BLOCK





www.econ.in
+91 95644 29 100

**LATEST & BEST
CONCRETE
BUILDING MATERIAL
FOR ANY
SIZE PROJECT**

GLOSSY INTERLOCKING PAVER

e-CON is an established name involved in the manufacturing and supplying of a wide array of Glossy Interlocking Pavers in customised colours, designs, dimensions to suit the demands of the clients. These are suitable for construction of walkways and pavements in various areas. Our Glossy Interlocking Paver offers an organized look. The Glossy Interlocking Pavers are ideal for outdoor paving and have various features that resist the damaging effects of weather to retain the look for a longer time. The raw material, such as cement and concrete, used for the manufacture of these pavers are obtained from a reliable vendor base to ensure the durability and high quality of the end products. Further, these are produced by us in a gamut of designs, sizes, and colours to suit the requirement of the individual clients. Widely used for fulfilling the flooring requirements of various places like houses, offices, and institutes.



ZIGZAG

288 pcs / 100 sft.



DAMRU

256 pcs / 100 sft.



DUMBLE

208 pcs / 100 sft.



MILANO

224 pcs / 100 sft.

LATEST & BEST CONCRETE BUILDING MATERIAL FOR ANY SIZE PROJECT



www.econ.in
+91 95644 29 100

FEATURES

- ATTRACTIVE LOOK
- EASY TO FIT
- NO MAINTENANCE
- HIGH STRENGTH
- ECONOMICAL
- EASILY REUSABLE
- SIZE: AS PER BUYER'S REQUIREMENT
- COLOR: AVAILABLE IN VARIOUS COLOR

IDEAL FOR



- GARDENS
- PATHS
- SWIMMING POOLS
- STORAGE YARDS
- FOOTPATHS
- LANDSCAPED & PARKING AREA
- WALKWAYS
- COMPOUNDS
- PUBLIC PARKS

SPECIFICATIONS OF CEMENT CONCRETE PAVERS:

Shape :	As per client's choice
Edges :	Chamfered
Application :	walkway, Driveway, Industrial.
Thickness :	40 mm, 60 mm , 80/100 mm.
Compressive Strength /finish :	200 kg/cm ² , 300 kg/cm ² , 300-500kg/cm ² . Smooth, Coarse.
No. Of layers :	Two
Top Layer :	1:1
Bottom Layer :	Design mix as per strength criteria.
Bed preparation :	WBM or lean P.C.C. (1:4:8 or 1:5:10) 75 mm thick.
Fixing Medium :	Mortar 25 mm (1:6) or 40mm sand with vibratory Compaction.
Slope / Gradient :	Adequate (Minimum 1% preferably 2%)
Grouting :	Dry Grouting
Edge Restraint :	Kerb stone or Retaining wall.
Abrasion Resistance :	Less than 3.
Water Absorption :	Less than 7% (After 24 Hrs.)



www.econ.in
+91 95644 29 100

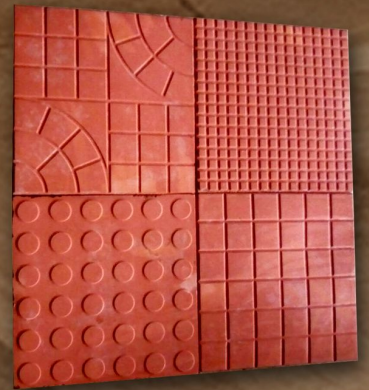

e-Con Precast System is a one-stop destination for availing Precast Concrete Building Components viz. Interlocking Glossy Pavers, Concrete Paving Tiles, Kerb Stones, R.C. Concrete Frames, Concrete Cover blocks, Manhole Cover, Concrete Bench and Precast Boundary wall. Available in various designs and patterns, the range can be provided in various dimensions and colours as well. All the products are manufactured using the best raw materials like, Sand, Cement, Fly Ash and Stone Chips etc. All the products are checked for quality at each stage of production and appreciated for durability, attractive designs, strength and affordable pricing.

Thank You